



SMR Trading's
Solenoid Valves
Catalogue

Unlocking Precision, One Valve at a Time

www.smrtradinguae.com

Products

01



SMARTZEN
2" SOLENOID VALVE BRASS
N/C 24V, PMAX;0-10BAR

02



SMARTZEN
1 1/4" SOLENOID VALVE BRASS N/C24V,
PMAX;0-10BAR

03



SMARTZEN
1" SOLENOID VALVE BRASS N/C 24V,
PMAX;0-10BAR

04



SMARTZEN
3/4" SOLENOID VALVE BRASS
N/C220V, PMAX;0-8BAR

05



SMARTZEN
3/4" SOLENOID VALVE BRASS
N/C24V, PMAX;0-10BAR

06




SMARTZEN
1/2" SOLENOID VALVE BRASS
N/C 220V, PMAX;0-8BAR

Characteristic

The direct-acting type diaphragm structure operates without requiring pressure to open. Additionally, the plate diaphragm structure ensures reliable opening and closing, which helps extend the product's lifespan.

Order Code

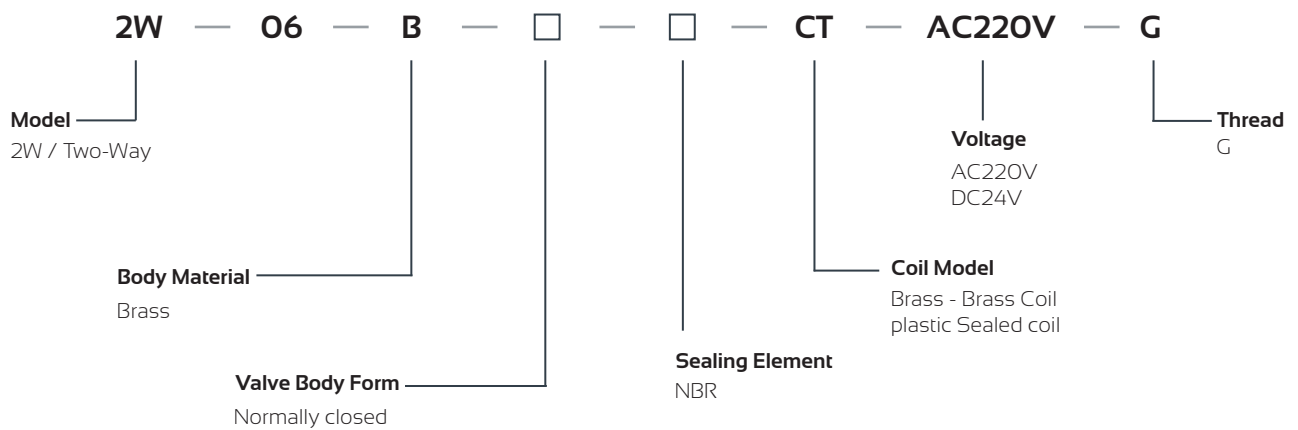


Structual specification

Model specification	2W-160-15	2W-200-20	2W-250-25	2W-320-32	20-500-50
Pipe Size	1/2"	3/4"	1"	1 1/4"	2"
Flow path	16mm	20mm	25mm	32mm	50mm
CV valve	4.8	7.6	12	24	48
Action mode	Normally closed type				
Working Pressure	(Water,air):0-10kgf/cm ²				

Specification

Model	Volts	Temperature	Pipe Size	Operating Pressure
2W-500-5	DC24V	-5°C-80°C	2"	Min.0 kg / cm -Max.10kg/cm ²
2W-32	DC24V	-5°C-80°C	1 1/4"	Min.0 kg / cm -Max.10kg/cm ²
2W-25	DC24V	-5°C-80°C	1"	0-10kg/cm ²
2W-20	DC24V	-5°C-80°C	3/4"	0-10kg/cm ²
2W-20	220V	-5°C-80°C	3/4"	Min.0 kg / cm -Max.10kg/cm ²
2W-15	220V	-5°C-80°C	1/2"	Min.0 kg / cm -Max.10kg/cm ²

Overall Dimension

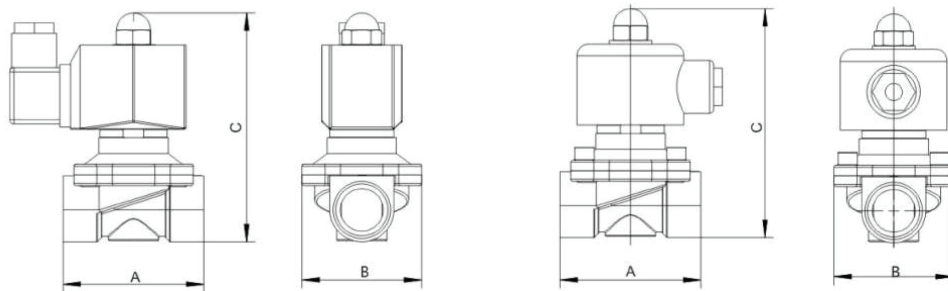

Copper

Model	A	B	C	Pipe Size
2W-160-15	62	55	102	1/2"
2W-200-20	67	55	113	3/4"
2W-250-25	85	73	117	1"
2W-320-32	98	77	135	1 1/4"
20-500-50	120	80	180	2"



CONTACT US
 +971 50 452 5467
sales@smrtradinguae.com
www.smrtradinguae.com

